

CERTIFICATION UNDER 37 CFR 1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date, 12-4-98, in an envelope as "Express Mail Post Office to Addressee," mailing label no. EL234201418US, addressed to: Assistant Commissioner for Patents, Box PATENT APPLICATION, Washington, D.C. 20231.

Beth Mulcahy
Beth Mulcahy

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of:

Inventor(s): BARNEY M. COHEN, KENNY KING-TAI NGAN, and XIANGBIN

LI

For: PLASMA PRECLEAN WITH ARGON, HELIUM, AND HYDROGEN
GASES

Enclosed are:


- ☒ Specification, Claims and Abstract
- ☒ (5) Sheet(s) of INFORMAL Drawings
- ☒ Combined Declaration and Power of Attorney
- ☐ Information Disclosure Statement (37 CFR 1.98)
- ☐ Art Cited by Applicant (Form PTO-1449)
- ☐ Cited References
- ☒ Assignment of Invention to Applied Materials, Inc.
- ☒ Recordation Cover Sheet (Form PTO-1595) (in duplicate)

The **large-entity** filing fee has been calculated as shown below:

	NO. FILED	LESS NO. PAID BY BASIC FEE	NO. EXTRA (Not less than zero)	
BASIC FEE				760.00
TOTAL CLAIMS	17	20	x 18 =	-0-
INDEP. CLAIMS	3	3	x 78 =	-0-
FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIMS +270				-0-
Total:				760.00

- ☐ Check number ____ in the amount of \$760.00 is enclosed for the filing fee and check number ____ in the amount of \$40.00 is enclosed for the assignment filing fee.
- ☒ **Please charge Deposit Account No. 01-1651/3049/MD/PVD/DV the amount of \$ 760.00 for the filing fee and \$40.00 for the recordation of the assignment. (A duplicate copy of this transmittal is enclosed.)**
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication, or credit any overpayment, to Deposit Account No. 01-1651/3049/MD/PVD/DV.
- ☒ Any additional fees required under 37 CFR 1.16.
- ☒ Any patent application processing fees under 37 CFR 1.17.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 01-1651/3049/MD/PVD/DV
- ☒ Any filing fees under 37 CFR 1.16 for presentation of extra claims.
- ☒ Any patent application processing fees under 37 CFR 1.17.
- ☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance,
pursuant to 37 CFR 1.31(b).

Respectfully submitted,



Robert W. Mulcahy
Registration No. 25,436
APPLIED MATERIALS, INC.
P. O. Box 450-A
Santa Clara, CA 95052
Attorney for Applicant

Please Direct MAIL to:
to:

Patent Counsel
APPLIED MATERIALS, INC.
P. O. BOX 450-A
Santa Clara, CA 95052

Please Direct TELEPHONE Communications

B. Todd Patterson
PATTERSON & ASSOCIATES
Telephone: 713/623-4844

UNITED STATES PATENT APPLICATION FOR:

PLASMA PRECLEAN WITH ARGON, HELIUM, AND HYDROGEN GASES

INVENTORS:

BARNEY M. COHEN
KENNY KING-TAI NGAN
XIANGBING LI

CERTIFICATE OF MAILING BY EXPRESS MAIL

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail, No. EL234201418US in an envelope addressed to Assistant Commissioner for Patents, Washington, D.C. 20231, on 12-9-98.

Beth Mulcahy
Name

Beth Mulcahy
Signature

12-9-98
Date of Signature

09206027, 120498

PLASMA PRECLEAN WITH ARGON, HELIUM, AND HYDROGEN GASES

Field of the Invention

The present invention relates to an apparatus and method for forming integrated
5 plug and wire interconnects on a substrate having submicron features. More particularly,
the present invention relates to a sequence for forming metal interconnects wherein a
patterned dielectric layer is exposed to a plasma containing an inert gas and a reactive gas.

Background of the Invention

10 Sub-half micron multilevel metallization is one of the key technologies for the next
generation of very large scale integration ("VLSI"). The multilevel interconnects that lie
at the heart of this technology require planarization of high aspect ratio features such as
plugs and other interconnects. Reliable formation of these interconnects is very important
to the success of VLSI and to the continued effort to increase circuit density and quality on
15 individual substrates and die.

Conventional chemical vapor deposition (CVD) and physical vapor deposition
(PVD) techniques are used to deposit electrically conductive material into the contact
holes, vias, trenches, or other patterns formed on the substrate. One problem with
conventional processes arises because the contact holes or other patterns often comprise
20 high aspect ratios, i.e., the ratio of the height of the holes to their width or diameter is
greater than 1. The aspect ratio of the holes increases as advances in technology yield
more closely spaced features.

The presence of native oxides and other contaminants within a small feature
typically results in voids by promoting uneven distribution of the depositing metal. The
25 native oxide typically forms as a result of exposing the exposed film layer/substrate to
oxygen. Oxygen exposure occurs when moving substrates between processing chambers
at atmospheric conditions, or when the small amount of oxygen remaining in a vacuum
chamber contacts the wafer/film layer, or when a layer is contaminated by etching. Other
contaminants within the features can be sputtered material from an oxide over-etch,
30 residual photoresist from a stripping process, leftover hydrocarbon or fluorinated
hydrocarbon polymers from a previous oxide etch step, or redeposited material from a
preclean sputter etch process. The native oxide and other contaminants create regions on
the substrate which interfere with film formation, by creating regions where film growth is

09206027-120498

stunted. Regions of increased growth merge and seal the small features before regions of limited growth can be filled with the depositing metal.

The presence of native oxides and other contaminants also can increase the via/contact resistance and can reduce the electromigration resistance of small features.

5 The contaminants can diffuse into the dielectric layer, the sublayer, or the deposited metal and alter the performance of devices which include the small features. Although contamination may be limited to a thin boundary region within the features, the thin boundary region is a substantial part of the small features. The acceptable level of contaminants in the features decreases as the features get smaller in width.

10 Precleaning of features using sputter etch processes is effective for reducing contaminants in large features or in small features having aspect ratios smaller than about 4:1. However, sputter etch processes can damage silicon layers by physical bombardment, sputter deposit Si/SiO₂ onto sidewalls of the features, and sputter metal sublayers, such as aluminum or copper, onto sidewalls of the features. For larger features, the sputter etch
15 processes typically reduce the amount of contaminants within the features to acceptable levels. For small features having larger aspect ratios, sputter etch processes have not been as effective in removing contaminants within the features, thereby compromising the performance of the devices which are formed.

Preclean by sputter etch processes is particularly unsuitable for features with
20 copper formed or exposed nearby. Copper easily diffuses through dielectrics, including sidewalls of vias formed in dielectrics, destroying or compromising the integrity of the dielectric. This diffusion is especially true for TEOS, thermal oxide and some low K dielectric materials. Therefore, a new preclean process without any bias on the substrate is needed for a Cu preclean application.

25 Referring to Figure 1, a substrate 10 including a hole 11 formed within an electrically insulative or dielectric layer 12 thereon, such as for example, a silicon dioxide or silicon nitride layer is shown. It is difficult to deposit a uniform metal-containing layer into the high aspect ratio hole 11 because contaminants on the sidewalls 14 of the holes promote uneven deposition of the metal containing layer. The metal containing layer
30 eventually converge across the width of the hole before it is completely filled, thus forming voids and discontinuities within the metal-containing material. Thereafter, the high mobility of metal atoms surrounding the voids causes the atoms to diffuse and minimize the surface area of the voids forming circular shaped voids as shown in Figure 1.

09206027.120498

These voids and discontinuities result in poor and unreliable electrical contacts.

Precleaning is preferably conducted with a mixture of an inert gas, typically argon, and a reactive gas, typically hydrogen. Mixtures of argon and hydrogen remove both reactive and non-reactive contaminants and can be used to modify the shape of contact holes, vias, trenches and other patterns to improve subsequent metal deposition processes. Increasing the argon content in the preclean mixture provides a corresponding increase in the etch rate of the preclean process and a corresponding decrease in the etch uniformity of the preclean process. Hydrogen must be included in the mixture to effectively remove reactive compounds or contaminants such as copper oxides and hydrocarbons. Precleaning patterned substrates with a mixture of argon and any amount of hydrogen provides a lower etch rate and an increased etch non-uniformity than precleaning with argon.

A preclean process having both high concentrations of reactive gases and improved etch rates would substantially promote removal of contaminants by addition of the reactive gases.

Summary of the Invention

The present invention provides a method and apparatus for precleaning a patterned dielectric layer to remove native oxides and polymers of hydrocarbons and fluorinated hydrocarbons from small feature sizes (such as quarter micron widths and smaller) and which may have high aspect ratios. Generally, the present invention provides a method and apparatus for providing a plasma comprising a mixture of argon, helium, and hydrogen to preclean a patterned substrate. Addition of helium to the gas mixture of argon and hydrogen surprisingly increases the etch rate in comparison to argon/hydrogen mixtures. Etch rates are improved for argon concentrations below about 75% by volume. The etch rate actually increases as the argon volume % drops from about 75% to about 25%, and then the etch rate declines as the argon volume % is further reduced.

Control of the etch rate is provided by controlling the mixture of argon, helium, and hydrogen, and by controlling the chamber pressure. Furthermore, RF power is capacitively and inductively coupled to the plasma to enhance control of the etch properties. Argon, helium, and hydrogen can be provided as separate gases or as mixtures, however, mixing of helium with 5% by volume of hydrogen is preferred for safety and etch performance.

Brief Description of the Drawings

So that the manner in which the above recited features, advantages and objects of the present invention are attained and can be understood in detail, a more particular description of the invention, briefly summarized above, may be had by reference to the
5 embodiments thereof which are illustrated in the appended drawings.

It is to be noted, however, that the appended drawings illustrate only typical embodiments of this invention and are therefore not to be considered limiting of its scope, for the invention may admit to other equally effective embodiments.

Figure 1 is a schematic partial sectional view of a patterned substrate showing a
10 randomly-oriented, fine-grained, granular deposition layer in a contact hole in the substrate with voids, discontinuities and a non-planar surface;

Figure 2 shows the overall layout of an substrate processing platform having a reaction chamber which generates a plasma to conduct a process of the present invention;

Figure 3 is a schematic partial sectional view of the reaction chamber suitable for
15 performing a plasma treatment process of the present invention;

Figure 4 shows the etch rate and etch uniformity for a preferred plasma comprising argon, helium, and hydrogen;

Figure 5 compares the etch rates of an argon/helium/hydrogen plasma to an argon/hydrogen plasma; and

Figure 6 compares the etch uniformity of an argon/helium/hydrogen plasma to an argon/hydrogen plasma.
20

Detailed Description of the Invention

The present invention provides an apparatus and method for precleaning a
25 patterned substrate having small feature sizes, such as quarter micron widths that typically have high aspect ratios, i.e., a depth that exceeds the width of the opening. Generally, the present invention provides a process for exposing the patterned substrate to a plasma comprising argon, helium, and hydrogen wherein the gas mixture is controlled to enhance physical or reactive cleaning as desired. Etching of silicon oxide or silicon nitride layers is
30 surprisingly enhanced by adding helium to mixtures of argon and hydrogen, especially when the argon content is less than 75% by volume.

The invention provides a suitable method for precleaning vias, contacts, and other features etched into a dielectric layer, such as a silicon dioxide layer that is etched in a dry

09206067-120199

or wet etch chamber, to expose a conductive or semi-conductive sublayer, such as Ge, Si, Al, Cu, or TiN sublayers. The feature exposes the sublayer so that the feature can be filled with a conductive or semi-conductive material which connects the sublayer and a subsequent metal interconnect layer to be deposited on the dielectric layer. Etching of the features in the dielectric typically leaves contaminants which should be removed to improve filling of the features and ultimately improve the integrity and reliability of the devices formed.

After etching of the dielectric layer, the features can have damaged silicon or metal residues within the features from over-etching of the dielectric layer. The features can also contain residual photoresist on the feature surfaces from the photoresist stripping and/or ashing process or residual hydrocarbon or fluorinated hydrocarbon polymers from the dielectric etch step. The features may also contain redeposited material on the feature surfaces following a sputter etch preclean process. These contaminants can migrate into the dielectric layer or can interfere with the selectivity of metallization by promoting uneven distribution of the depositing metal. The presence of the contaminants also can increase the resistance of the deposited metal by substantially narrowing the width of the feature, and thus creating a narrowed portion in the metal forming the via, contact line, or other conductive feature.

The submicron features that are cleaned and filled in accordance with the present invention, are formed by conventional techniques which deposit a dielectric material over a surface on a semiconductor substrate. Any dielectric material, whether presently known or yet to be discovered, may be used and is within the scope of the present invention, including low dielectric materials such as organic polymers and aerogels. The dielectric layer may comprise one or more distinct layers and may be deposited on any suitable deposition enhancing sublayer. The preferred deposition enhancing sublayers include conductive metals such as Al and Cu, and barrier surfaces such as TiN, Ta, and TaN.

Once deposited, the dielectric layer is etched by conventional techniques to form vias, contacts, trenches or other submicron features. The features will typically have a high aspect ratio with steep sidewalls. Etching of the dielectric layer may be accomplished with any dielectric etching process, including plasma etching. Specific techniques for etching silicon dioxide include such compounds as carbon tetrafluoride and silicon hexafluoride. However, patterning may be accomplished on any layer using any method known in the art.

A Preferred Precleaning Apparatus

A schematic of a multichamber processing apparatus 35 suitable for performing the CVD, PVD, and plasma treatment process steps of the present invention is illustrated in Figure 2. The apparatus is an "ENDURA" system commercially available from Applied Materials, Inc., Santa Clara, California. The particular embodiment of the apparatus 35 shown herein is suitable for processing planar substrates, such as semiconductor substrates, and is provided to illustrate the invention, and should not be used to limit the scope of the invention. The apparatus 35 typically comprises a cluster of interconnected process chambers, for example, preclean chambers, CVD and PVD deposition chambers, and rapid thermal annealing chambers.

The apparatus 35 preferably includes at least one enclosed PVD or CVD deposition chamber 36. The apparatus also comprises a preclean chamber 40 (shown in Figure 3). The precleaning process of the present invention is preferably conducted on a PreClean II chamber which is available from Applied Materials, Inc., Santa Clara, California. In a preclean chamber, reactive H radicals are formed and are introduced into the neighborhood of the substrate as primarily neutral species, *i.e.*, not having an electric charge and therefore not an ion, thereby preventing generation of self bias and bombardment of the wafer surface by ions.

Preclean Chamber

Referring now to Figure 3, a processing chamber for conducting the process of the invention is shown schematically in a section view. The processing chamber can be a Preclean II chamber which is available from Applied Materials, Santa Clara, California. A vacuum chamber 111 is formed by a base member 112 having sidewalls 114 and which are preferably made of metallic construction such as stainless steel, aluminum or the like. An opening 115 in the base of the body member 112 is connected to a throttle valve 113 and a turbo pump 116 which is used to control the gas pressure inside the chamber 111. The throttle valve 113 is automated to allow servo control to a specific pressure. A quartz dome 117 forms the top of the chamber 111 and is provided with a flange 118 about its circumference where it mates with the top circumference of the sidewalls 114 of base member 112. A gas distribution system 119 is provided at the juncture of quartz dome 117 and base member 112. The top of the metallic sidewall member 114 has a gas supply trench 137 milled therein and from six to twelve evenly spaced (angularly) disposed

channels extending from one or more gas sources intersect the channel to form a plurality of gas injection holes. The gas distribution system 119 supplies Ar, He, and H₂ gases which are typically metered by mass flow controllers 136. Hydrogen may also be supplied as a mixture with helium having about 5% hydrogen by volume for safe delivery of the hydrogen. However, a separate hydrogen line is still provided to attain hydrogen concentrations greater than 5% by volume. A pedestal 122, which is arranged to hold a wafer (not shown), has a quartz body 121 surrounding the sides and bottom of a conductive portion 120. An insulating layer 129 may be placed between the conductive portion 120 of the pedestal 122 and the wafer.

RF power from an RF source 134 is applied capacitively to the conductive portion 120 of the pedestal 122. A RF match box 135 adjusts the chamber impedance to optimize power transfer between the power source 134 and the pedestal 122. Typical RF frequencies are from about 2 MHz to about 60 MHz at power levels from about 10W to about 500W.

Additional power is inductively supplied to the plasma by energizing coils 125 wound exterior to the quartz dome 117 and supported by the cover 127. An alternating axial electromagnetic field is produced in the chamber 111 interior to the winding of the coils 125. Generally, an RF frequency between 200 KHz and 16 MHz is employed. A 2 MHz frequency is common. An RF source 132 operating at this frequency is coupled to the coil 125 by matching network 133.

The flow of argon preferably ranges from about 5 to about 50 sccm, and the flow of helium/hydrogen preferably ranges from about 0 sccm to about 2000 sccm for 200 mm substrates. Chamber pressures are between about 1 mTorr and about 200 mTorr. The plasma treatment effectively cleans, treat, and/or modifies the patterned surface in 10 to 150 seconds. After precleaning, a CVD or PVD metal layer is deposited on an optional liner or nucleation layer.

Examples

The precleaning steps of the present invention have been combined in the preclean chamber shown in Figure 3 to successfully clean features etched in a dielectric layer having a copper or silicon sublayers prior to filling of the features with Cu, Al, or W plugs. The chamber was stabilized for 5 seconds at a pressure of 5-20 mTorr with a mixture of H₂, He, and Ar. The features were then cleaned for 60 seconds by applying

from 300W to 450W of 2 MHz RF power to the coil and 10W to 300W of 13.56 MHz RF power to the pedestal.

Example 1

5 Examples of the present invention were performed by varying the gas mixture from 100% argon to 10% argon to preclean a patterned substrate surface in a Preclean II chamber on an ENDURA® platform available from Applied Materials, Inc. A silicon wafer having sub 0.30 μm wide contacts, vias, trenches, and other patterns, having an aspect ratio $\geq 4:1$ (*i.e.*, a depth of at least 1.20 μm) was introduced into the system. The
10 wafer was then plasma treated with a mixture of argon and He/H_2 wherein helium and hydrogen were provided as a mixture having 5% hydrogen by volume.

Referring to Figure 4, the etch uniformity drops continuously as the helium mixture is added to the process gas. Further, the etch rate improves until the argon percentage is reduced to 25% by volume.

Example 2 (Comparison)

15 For comparison, Example 1 was repeated without the helium. Figure 5 compares the etch rate for the $\text{Ar}/\text{He}/\text{H}_2$ plasma of Example 1 and the Ar/H_2 plasma of Example 2. Figure 6 compares the etch uniformity for the $\text{Ar}/\text{He}/\text{H}_2$ plasma of Example 1 and the
20 Ar/H_2 plasma of Example 2.

While the foregoing is directed to the preferred embodiment of the present invention, other and further embodiments of the invention may be devised without departing from the basic scope thereof. The scope of the invention is determined by the claims that follow.

09206027.120498

What is claimed is:

- 1 1. A method for processing a substrate, comprising exposing a patterned substrate
2 surface to a plasma comprising argon, helium and hydrogen in a processing chamber.
- 1 2. The method of claim 1, wherein the plasma comprises less than about 75% by
2 volume of argon.
- 1 3. The method of claim 2, wherein hydrogen is provided to the processing chamber in
2 a mixture of about 95% helium by volume and about 5% hydrogen by volume.
- 1 4. The method of claim 1, wherein etch rate increases when helium content is
2 increased.
- 1 5. The method of claim 1, wherein the substrate surface comprises silicon oxide or
2 silicon nitride.
- 1 6. The method of claim 1, wherein the plasma is capacitively and inductively
2 powered.
- 1 7. The method of claim 1, wherein the processing chamber is maintained at a pressure
2 from about 1 mTorr to about 200 mTorr.
- 1 8. A method for processing a substrate, comprising:
2 (a) exposing a patterned substrate surface to a plasma comprising argon,
3 helium and hydrogen in a reaction chamber; and
4 (b) increasing the helium content of the plasma to increase etching of the
5 patterned substrate surface.
- 1 9. The method of claim 8, wherein the plasma comprises less than about 75% by
2 volume of argon.

09206027, 120498

1 10. The method of claim 9, wherein hydrogen is provided to the reaction chamber in a
2 mixture of about 95% helium by volume and about 5% hydrogen by volume.

1 11. The method of claim 8, wherein the substrate surface comprises silicon oxide or
2 silicon nitride.

1 12. The method of claim 8, wherein the plasma is capacitively and inductively
2 powered.

1 13. The method of claim 1 wherein the reaction chamber is maintained at a pressure
2 from about 1 mTorr to about 200 mTorr.

1 14. A method for processing a substrate, comprising:

2 (a) exposing a patterned substrate surface to a plasma comprising argon,
3 helium and hydrogen in a reaction chamber, wherein the plasma is capacitively and
4 inductively powered; and

5 (b) increasing the helium content of the plasma to increase cleaning of the
6 patterned substrate surface, wherein the plasma comprises less than about 75% by volume
7 of argon.

1 15. The method of claim 14, wherein hydrogen is provided to the reaction chamber in
2 a mixture of about 95% helium by volume and about 5% hydrogen by volume.

1 16. The method of claim 15, wherein the substrate surface comprises silicon oxide or
2 silicon nitride.

1 17. The method of claim 14, wherein the reaction chamber is maintained at a pressure
2 from about 1 mTorr to about 200 mTorr.

09206027, 120498

Abstract of the Disclosure

The present invention provides a method and apparatus for precleaning a patterned substrate with a plasma comprising a mixture of argon, helium, and hydrogen. Addition of
5 helium to the gas mixture of argon and hydrogen surprisingly increases the etch rate in comparison to argon/hydrogen mixtures. Etch rates are improved for argon concentrations below about 75% by volume. RF power is capacitively and inductively coupled to the plasma to enhance control of the etch properties. Argon, helium, and hydrogen can be provided as separate gases or as mixtures.

10

09206627.1 2019081021 22090260

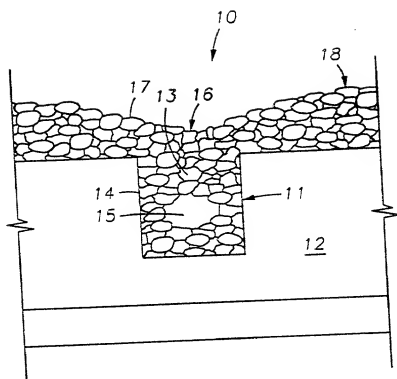


FIG. 1
(PRIOR ART)

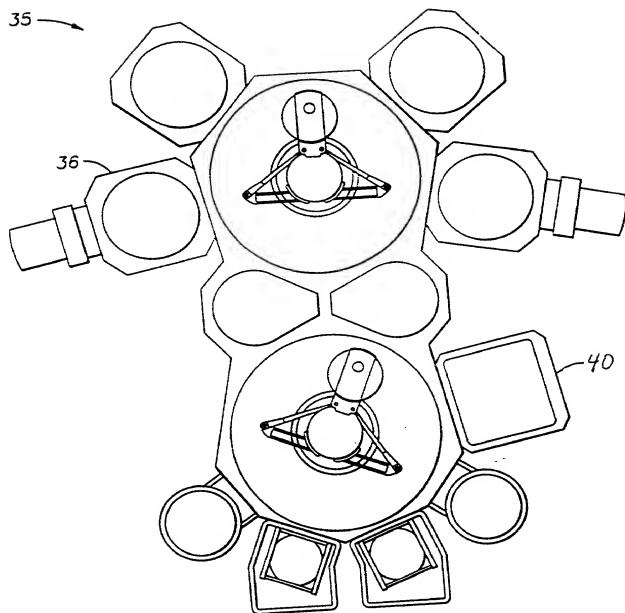


FIG. 2

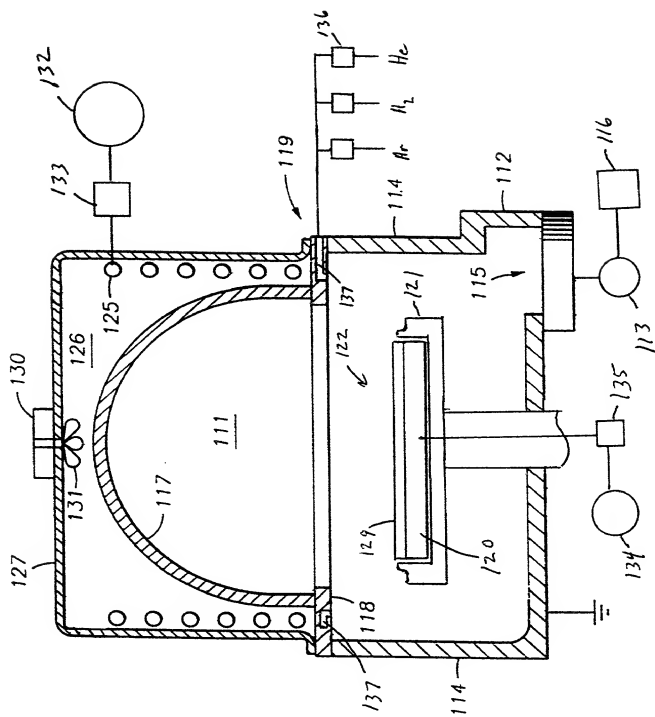


FIG. 3

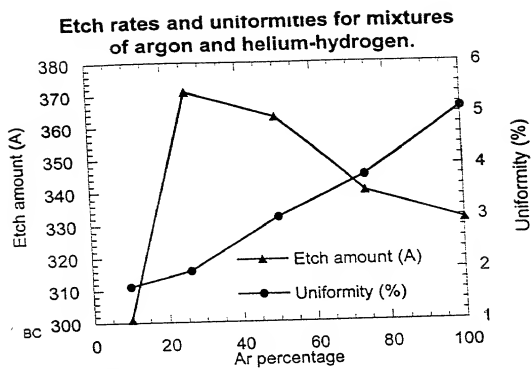


Figure 4.

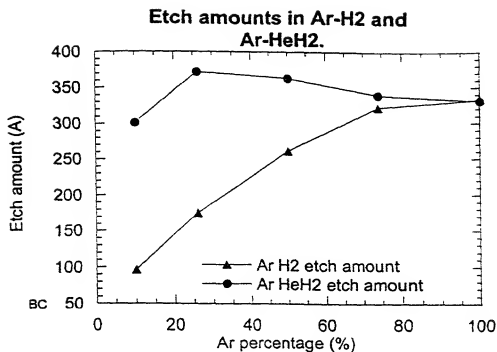


Figure 5

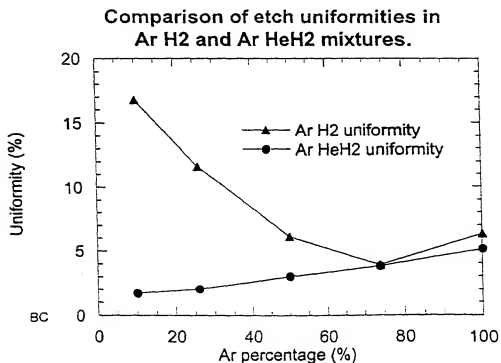


Figure 6

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

This declaration is of the following type:

- ☒ original
- ☐ divisional
- ☐ continuation
- ☐ continuation-in-part

INVENTORSHIP IDENTIFICATION

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE OF INVENTION

PLASMA PRECLEAN WITH ARGON, HELIUM AND HYDROGEN GASES

SPECIFICATION IDENTIFICATION

The specification of which:

- ☒ filed herewith;
- ☐ was filed on _____, under Serial No. _____, executed on even date herewith; or
- ☒ Express Mail No. EL234201418US (Serial No. not yet known) and was amended on _____ (if applicable)
- ☐ was described and claimed in PCT International Application No. _____ filed on _____ and as amended under PCT Article 19 on _____.

ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56, and which is material to the examination of this application; namely, information where there is a substantial likelihood that a reasonable Examiner would consider it important in deciding whether to allow the application to issue as a patent, and

- ☐ In compliance with this duty there is attached an Information Disclosure Statement in accordance with 37 CFR §1.98.

PRIORITY CLAIM (35 U.S.C. §119)

I hereby claim foreign priority benefits under Title 35, United States Code, §119, of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below, and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

☒ No such applications have been filed.

☐ Such applications have been filed as follows:

- A. **Prior foreign/PCT application(s) filed within 12 mos. (6 mos. for design) prior to this application, and any priority claims under 35 U.S.C. §119**

<u>Country/PCT</u>	<u>Application No</u>	<u>Date Filed</u>	<u>Priority Claimed</u>
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

- B. **All foreign application(s), if any, filed more than 12 mos. (6 mos. for design) prior to this U.S. application**

Country:

Application No:

Filing date:

PRIORITY CLAIM (35 U.S.C. §120)

I hereby claim the benefit under Title 35, United States Code, Section 120, of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information that is material to the examination of this application (namely, information where there is substantial likelihood that a reasonable Examiner would consider it important in deciding whether to allow the application to issue as a patent) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application.

- ☐ No such applications have been filed
☐ Such application have been filed, as follows:

Serial No.	Filing Date	Patented	Pending	Abandoned
(None)				

POWER OF ATTORNEY

I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Michael L. Sherrard	Registration No. 28,041
Peter J. Sgarbossa	Registration No. 25,610
Donald Verplancken	Registration No. 33,217
Lawrence Edelman	Registration No. 25,226
Michael B. Einschlag	Registration No. 29,301
Raymond Kam-On Kwong	Registration No. 37,165
James C. Wilson	Registration No. 35,412
Robert W. Mulcahy	Registration No. 25,436
B. Todd Patterson	Registration No. 37,906
Keith M. Tackett	Registration No. 32,008
D. Brit Nelson	Registration No. 40,370

Send correspondence to:

Patent Counsel
APPLIED MATERIALS, INC.
P. O. Box 450-A
Santa Clara, CA 95052

Direct telephone calls to:

B. Todd Patterson
PATTERSON & ASSOCIATES
(713) 623-4844

DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and, further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Sec. 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full name of **first** inventor: BARNEY M. COHEN

Inventor's signature: Barney M. Cohen Date: Dec. 3, 1998
Residence: Santa Clara, California 95051
Post Office Address: 2931 Marietta Drive
U.S.A.

Country of Citizenship: U.S.A.

Full name of **second** inventor: KENNY KING-TAI NGAN

Inventor's signature: Kenny King-Tai Ngan Date: Dec. 3, 1998
Residence: Fremont, California 94539
Post Office Address: 43793 Cameron Hills Drive
U.S.A.

Country of Citizenship: U.S.A.

Full name of **third** inventor: XIANGBING LI

Inventor's signature: Xiangbing Li Date: Dec. 3, 1998
Residence: San Jose, California 95128
Post Office Address: 648 Villa Centre Way
U.S.A.

Country of Citizenship: P.R. China

(Declaration ends with this page)